



ASX RELEASE: 29 October 2025

Yundamindra Gold Project, WA – Exploration Update

HIGH-GRADE GOLD IN MAIDEN DRILLING OF NEW GEOPHYSICAL TARGETS SOUTH OF PENNYWEIGHT POINT

Second target corridor at Yundamindra, the “Red Brick Road” rapidly taking shape with maiden drilling 2km south the Pennyweight Point hitting significant gold mineralisation

KEY HIGHLIGHTS

- Significant shallow gold mineralisation intersected in first-pass reconnaissance drill testing of new geophysical targets 2km south of Pennyweight Point.
- New assay results include:
 - 4m @ 9.21g/t Au from 48m (25AYRC089), *including:*
 - 1m @ 35.30g/t Au from 48m
 - 2m @ 3.33g/t Au from 47m (25AYRC090),
 - 3m @ 1.14g/t Au from 57m (25AYRC092),
 - 13m @ 0.24g/t Au from 51m(25AYRC094)
- The latest results validate Arika’s targeting approach and confirm the potential of the eastern Pennyweight Point structural corridor, the “Red Brick Road”, to host significant gold mineralisation outside of the known occurrences.
- Expansional drilling is now in progress at Pennyweight Point itself testing for down-plunge extensions to a series exceptional intersections achieved from previous diamond drilling.
- ~16,500 metres drilled to date as part of the latest program, with assays awaited for 40 holes.

Arika Resources Limited (ASX: ARI) (“Arika” or “Company”) is pleased to report latest assay results from ongoing drilling at the **Yundamindra Gold JV Project**, located 65km south-west of Laverton in the world-class Northeastern Goldfields mining district of WA.

Arika launched an extensive step-out drilling campaign in June, with over 16,000m of Reverse Circulation (RC) drilling completed to date.

The aim of the program is to test depth and strike extents of multiple known gold occurrences and newly defined targets throughout the Yundamindra area, highlighting the scale of the opportunity at the project.

Drilling has continued to systematically test multiple gold targets, including:

- **The ‘Yellow Brick Road’** – Landed at Last Trend within the Western Corridor;
- **The ‘Emerald City Trend’** – South-Central Complex; and
- Most recently along the **‘Red Brick Road’** – Pennyweight Point Trend within the Eastern Corridor (Figures 1-5).

This announcement provides a summary of the most recently received results for holes 25YMRC089-25YMRC100 inclusive, which were designed as a first-pass test of new geophysical targets identified from the recently completed aeromagnetic and ground gravity surveys at Pennyweight Point.

Wide-spaced drill testing was also undertaken across several areas where high-grade rock chips were recorded, associated with east-west shears and historical workings west of Pennyweight Point, close to the eastern contact with the Danjo Granite.

The results are preliminary and include 1m individual assays and 4m composite assays. Anomalous results reported from 4 metre composite samples will be re-split and re-submitted on a 1m basis to refine the distribution of gold mineralisation within each of these samples.

To date, a total of 149 holes for ~16,500 metres have been completed as part of the program, with assays still awaited for 40 holes or approximately 6,000 metres.

Drilling remains ongoing at Pennyweight Point.

Arika's Managing Director, Justin Barton, said:

“Hot on the heels of the exciting results reported this week from the central portion of the Yellow Brick Road – within the Western Corridor at Yundamindra – we have now received results from initial reconnaissance drilling in the Eastern Corridor at Yundamindra, south of Pennyweight Point.

“We seized the opportunity to drill some of the priority, new gravity/magnetic geophysical targets in this area as soon as the initial interpretation had been completed because they’re such strong, technically sound targets.

“This decision has been vindicated by the assays, which include a best intercept of 4m at 9.21g/t including an exceptionally high-grade interval of 1m at 35.3g/t, plus numerous other significant results from initial wide-spaced reconnaissance drilling.

“To get such fantastic results off the bat is a credit to the great work our technical team is doing, further validating our targeting processes. Importantly, we’re also seeing the same rocks that host the mineralisation at Pennyweight Point, which makes the Red Brick Road a very exciting and very large exploration opportunity for us moving forward, with multiple high grade gold targets.

“Results from the recently completed IP surveys have further refined the targets along the Pennyweight Point trend and we’re systematically drilling there now.

“Close-spaced drilling at Pennyweight Point will give us a better understanding of the controls on the mineralisation at a local scale, enabling us to step-out with increasing confidence.

“We have now clearly defined two large, high-priority structural corridors at Yundamindra – the Yellow Brick Road on the western side and the Red Brick Road on the eastern side.

“Each corridor is book-ended by an advanced prospect with near-term resource potential – Landed at Last on the west and Pennyweight Point on the east – and each offers multiple walk-up drill targets with near-term resource definition potential. Its a fantastic position to be in and presents multiple value propositions for our shareholders.”

A summary of drill-hole collar locations and preliminary results for all holes are presented in Appendix 1, Table 1

Figures 1 to 4 present Prospect Location Plans, Drill-hole Collar Plans with recent intercept summaries over new geophysical targets and surface geochemistry, Schematic Long Section and Regional Project Location Plan.



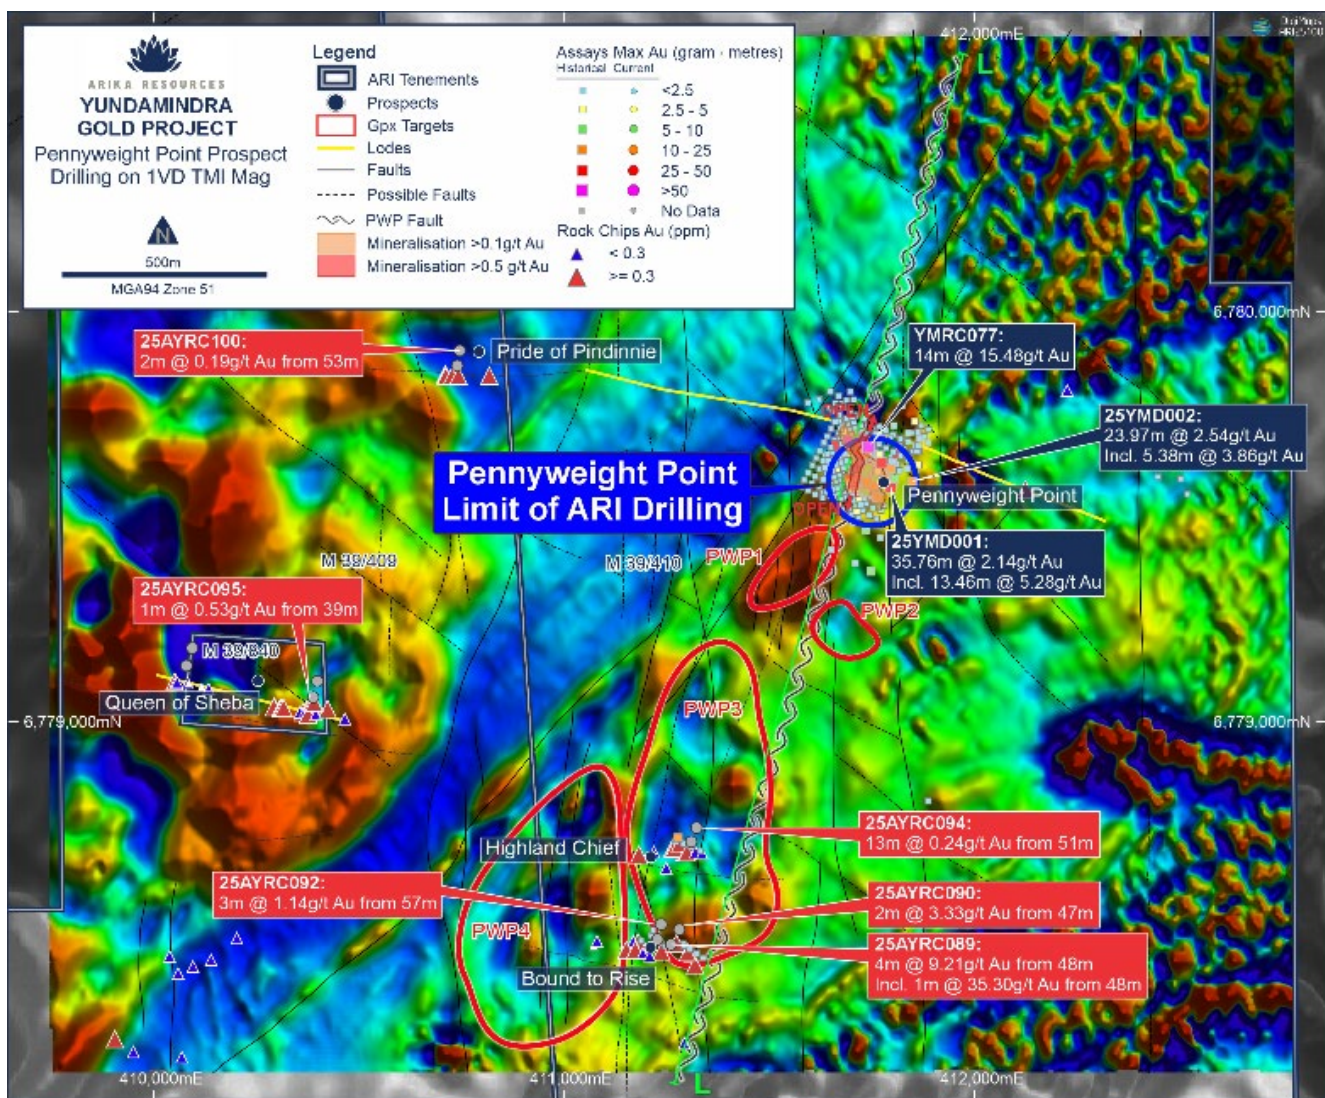


Figure 1: Red Brick Road, Yundamindra Gold Project showing key prospect locations, Geophysical structural targets with recent intersection summaries, 2025 RC and diamond drill-holes, 2024 RC holes and historical drilling, over TMI

Drilling Results Summary

Yundamindra is dominated by the Danjo Granite Dome in the central-north of the project area and the Bulla Rocks Granite Dome to the west. The domes are flanked to the east and west by attenuated greenstone belts occupying NE and NW striking shear zones displaying multiple ~NE-SW striking second and third order linking structures. The eastern and western shear zones converge south of the Danjo dome in the Southern Complex which is characterised by a widespread array of N-S striking, possible axial-planar shears, and major E-W trending cross-cutting faults.

These major structural trends are described as the Yellow Brick Road - Western Corridor, Red Brick Road – Eastern Corridor and Emerald City - South Complex respectively. (Figure 1)

Arika's drilling along the Red Brick Road-Eastern Corridor (RBR) to date has been focused on testing for strike and depth extensions at Pennyweight Point (PWP). The drilling has been highly successful in confirming significant widths of high-grade gold mineralisation extending continuously from surface to a maximum drilled depth of 200m over a strike length of at least 150m.

A re-interpretation of earlier RC drilling results north and south of the main zone at PWP indicates that the holes were terminated within hangingwall mineralisation prior to reaching the main target, and as a consequence are now considered to have been ineffective. Where possible these holes will be re-entered and extended to cover the target horizon.

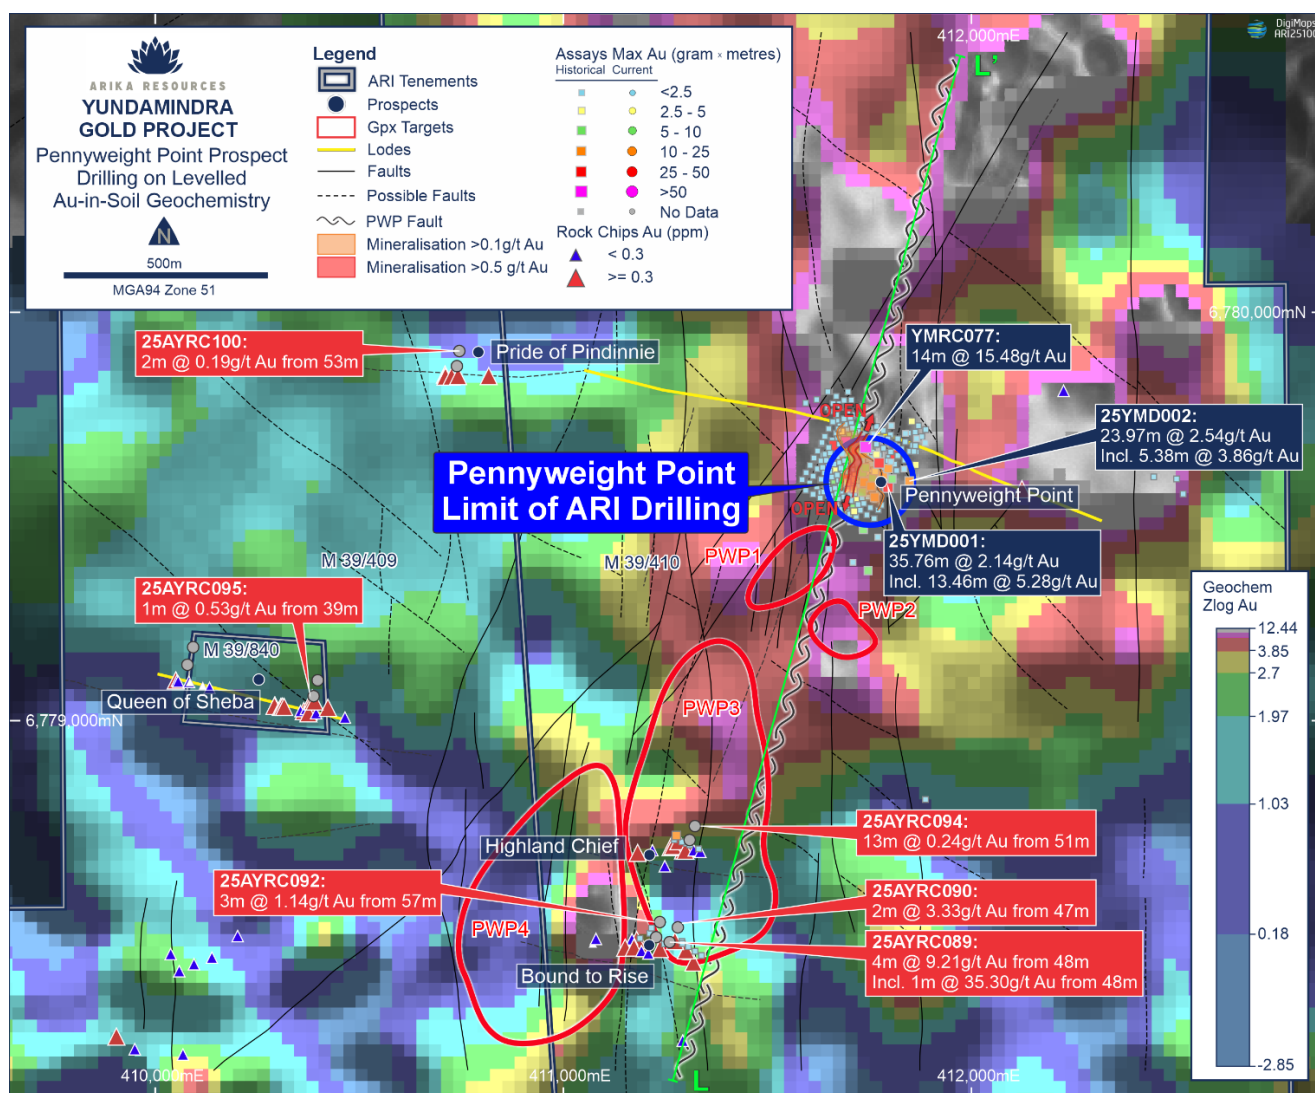


Figure 2: Red Brick Road, Yundamindra Gold Project showing key prospect locations, Geophysical structural targets with recent intersection summaries, 2025 RC and diamond drill-holes, 2024 RC holes and historical drilling, over TMI (left) and Gold-in-soil geochemical anomalies (right).

The main objectives of the ongoing program at Yundamindra are to test:

- **Depth extensions:** to confirm the continuity of ore hosting structures well below the depth of historical workings and previous shallow drilling, and
- **New targets:** First-pass drill testing of newly identified geochemical/geophysical/geological targets.

Gold mineralisation within the RBR has been identified within both granite and mafic rocks close to the contact between the Danjo Granite and a wide sequence of mafic volcanic rocks to the east. At PWP gold occurs within a major NE trending, moderately east dipping shear zone at the contact between mafic volcanics (basalt) and granite (tonalite). Near surface, the host structure includes the development of multiple quartz vein filled shears whilst at depth quartz veining is almost entirely absent. Further west, and closer to the main contact with the Danjo granite, gold mineralisation has been identified within sub-vertical and shallow north dipping, E-W trending, quartz-filled shear zones hosted entirely within granite (Queen of Sheba, Pride of Pindinnie, Washington)

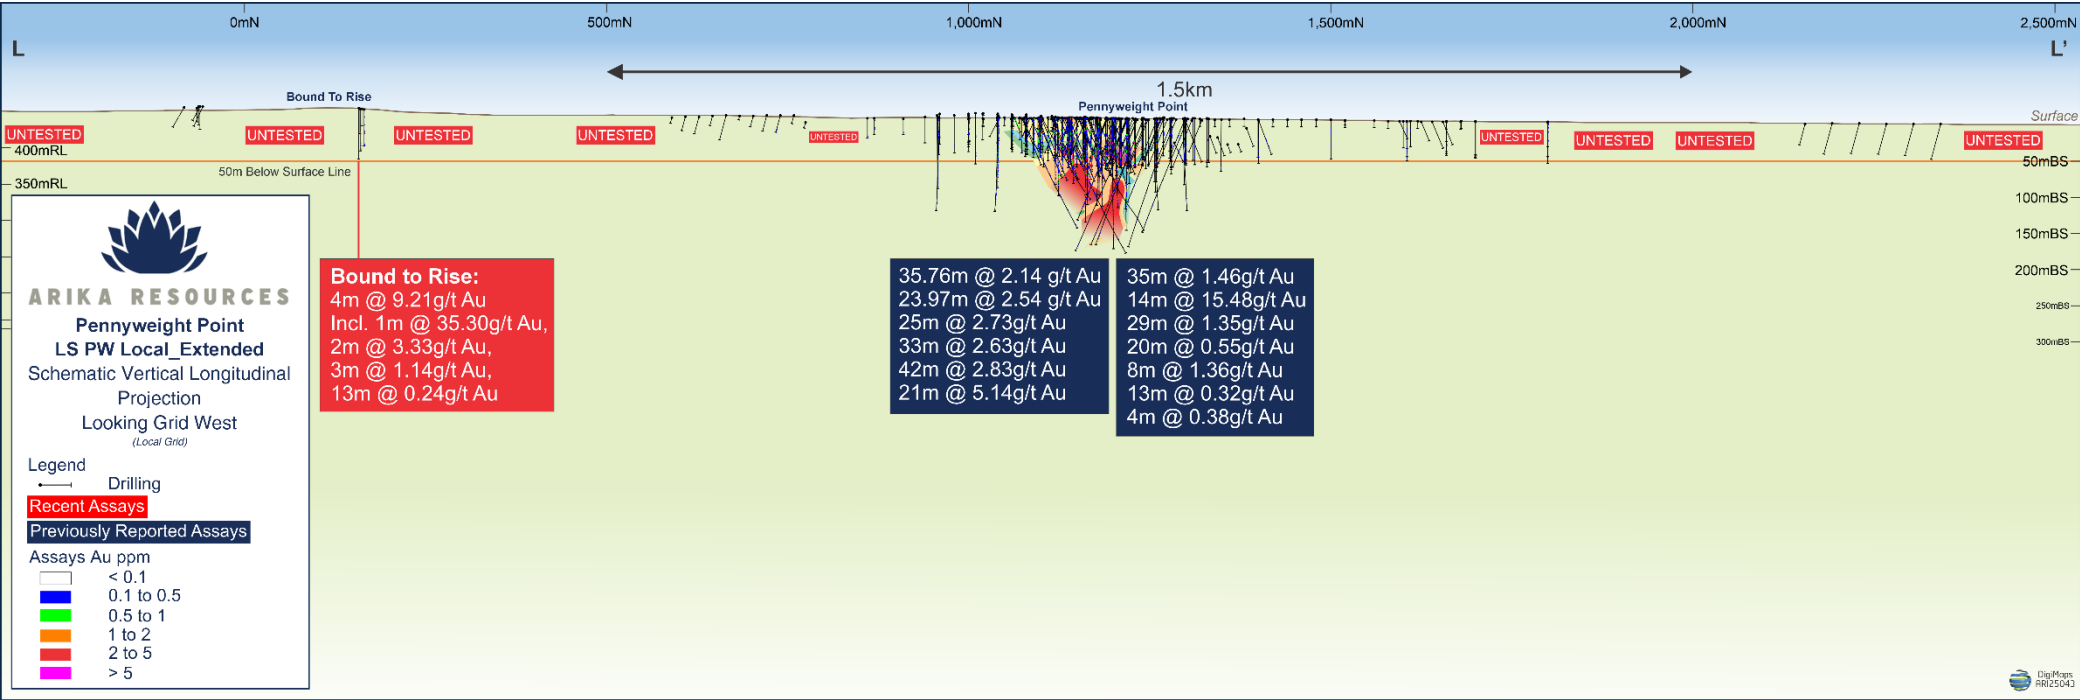


Figure 3: Yundamindra Gold Project – Vertical Longitudinal Projection of The Red Brick Road Eastern Corridor looking west showing recent results, Arika’s 2025 RC and Diamond drilling, 2024 RC drilling, and historical holes.

NOTE the lack of drilling beneath 50m vertical depth.



Geophysical Target PWP 3

Six holes were completed along four wide spaced sections as a first pass test of depth and strike extensions to a series of E-W trending shears associated with the historical Bound to Rise workings located towards the eastern margin of Geophysical Target PWP3.

Each of the holes have reported significant gold mineralisation in a similar geological/structural setting to Pennyweight Point, i.e. associated with elevated silver and copper assays and hosted within basalt and/or in contact between basalt and granite(tonalite).

Results include:

- 4m @ 9.21 g/t Au from 48m (25AYRC089), *including:*
 - 1m @ 35.30 g/t Au from 48m

Wide-spaced shallow drilling of historical workings including Queen of Sheba and Pride of Pindinnie has been successful in confirming extensions to the ore hosting structures. While only low-grade gold values have been reported in this phase, additional work is warranted to test for improvement of grades and widths further along strike and depth.

Next Steps

Yundamindra

- Close-spaced deposit definition sectional drilling is currently in progress at Pennyweight Point.
- Testing of new targets along 'The Red Brick Road Trend' – Eastern Corridor identified from the recently completed geophysical surveys over the extended Pennyweight Point structural corridor will follow.
- Results will be released continuously once data is received and interpreted.

Yundamindra Gold Project

The Yundamindra Gold JV Project is located 65km south-west of Laverton, 250km north of Kalgoorlie, Western Australia (Figure 8). The Project is a Joint Venture between Arika Resources Ltd (ASX: ARI) and Nex Metals (ASX: NME), where Arika holds 80% and NME holds 20% with Arika acting as Project manager.

Regionally, it is situated toward the westernmost margin of the Laverton Greenstone Belt (LGB) in the Yilgarn Craton of Western Australia.

The Laverton Greenstone Belt is one of the best endowed gold regions in Australia. It hosts two world-class producing mines, namely Sunrise Dam at 8 million oz contained Gold and Wallaby at 7 million oz contained gold (Standing 2008; Austin, 2022)¹, which are located just ~20-30km east of Arika's Yundamindra Gold Project. Total gold production from the belt is estimated to be in excess of 28 million ounces.

² Standing, Jonathon G, Terrane Amalgamation in the Eastern Goldfields Superterrane, Yilgarn Craton: Evidence from tectonostratigraphic studies of the Laverton Greenstone Belt. Precambrian Research, V161, Issues 1-2, 15 February 2008, pages 114-134.. Austin, Joseph Martin, Testing the 'terrane-boundary' concept and geodynamics in the NeoArchean: A case study of the stratigraphy from the West and East Laverton Greenstone Belts. Queensland University of Technology 2022.134.. Austin, Joseph Martin, Testing the 'terrane-boundary' concept and geodynamics in the NeoArchean: A case study of the stratigraphy from the West and East Laverton Greenstone Belts. Queensland University of Technology 2022.

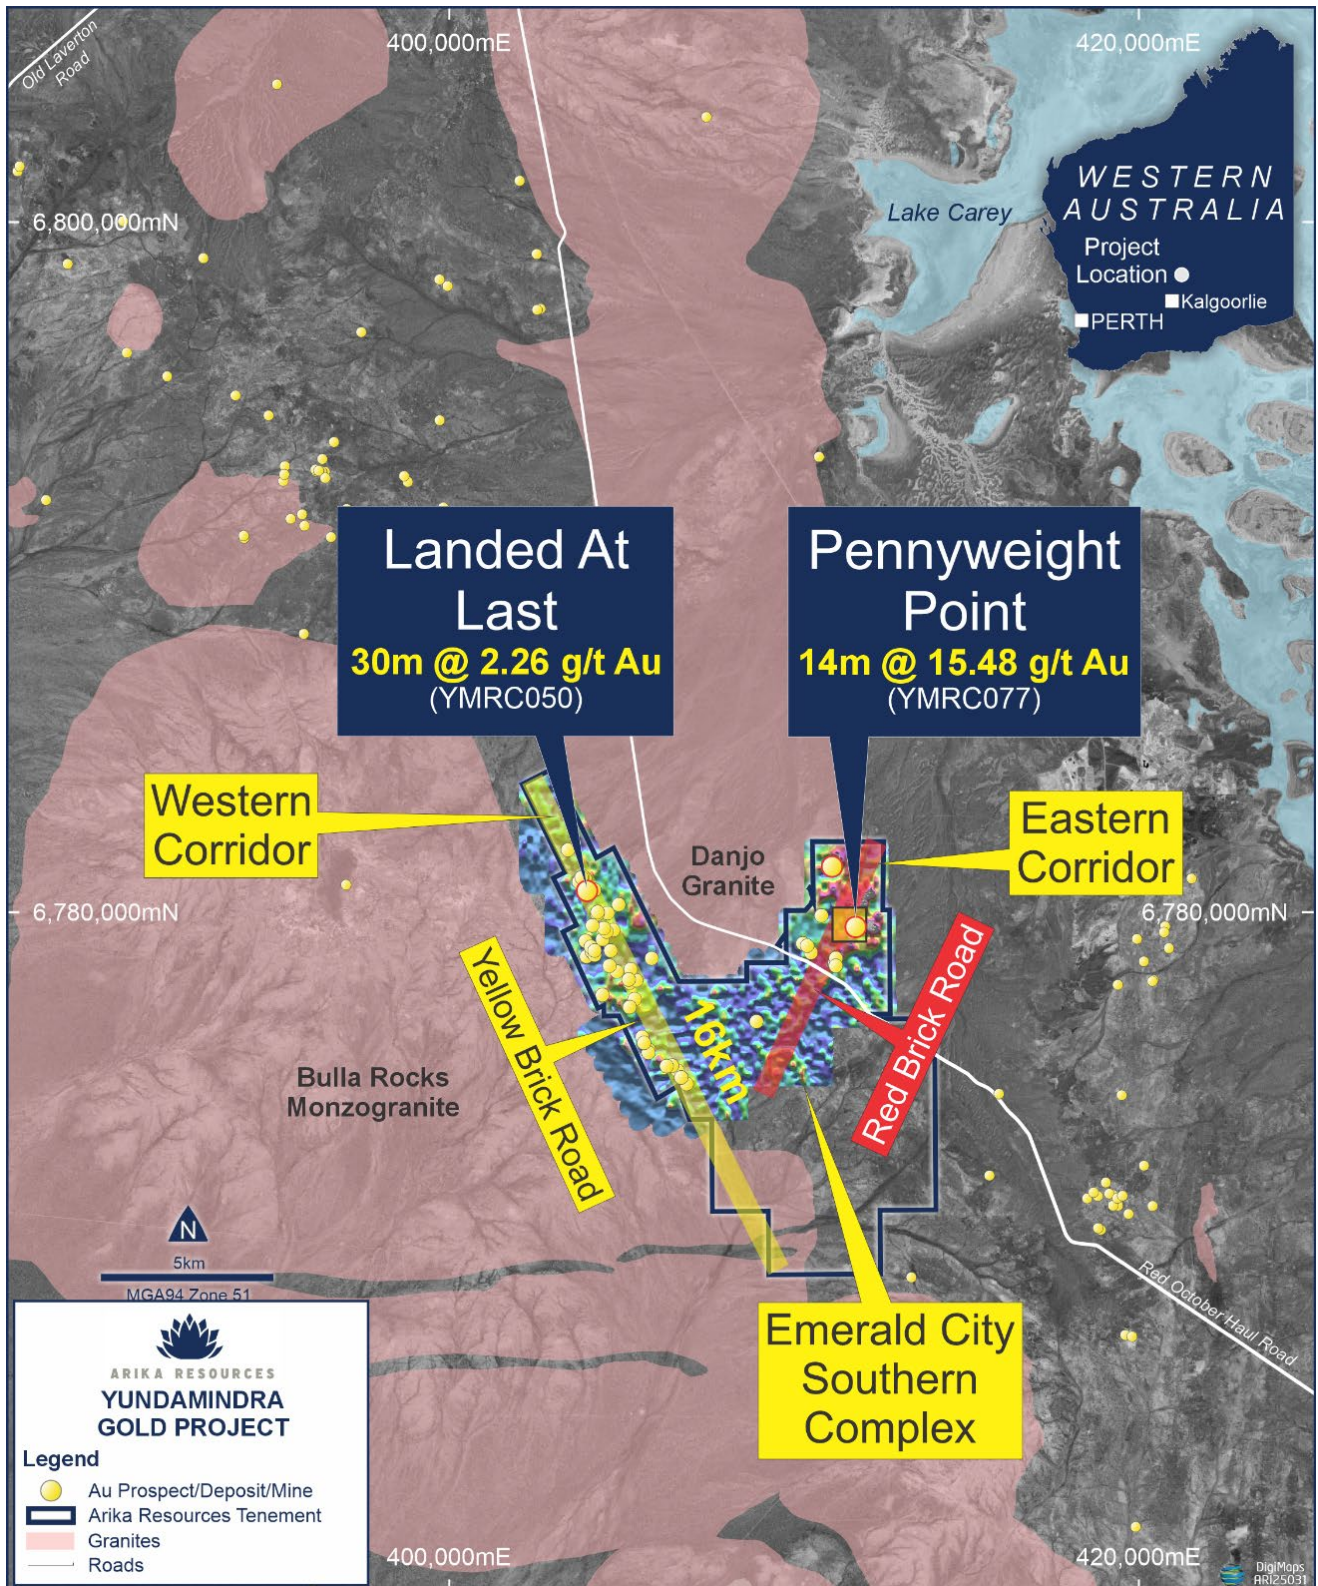


Figure 4: Yundamindra Gold Project showing key prospect locations

The Laverton Greenstone Belt is one of a number of greenstone belts that collectively define the Kurnalpi tectonostratigraphic terrane of the Northeastern Goldfields ‘Superterrane’.

The Kurnalpi Terrane is bounded by the regionally recognisable Hootanui Shear Zone to the east and the Ockerburry Shear Zone to the west – long-lived, deep crustal/mantle penetrating structures which, along with their related second order faults, are considered responsible for the development of many of the region’s most significant gold deposits.

At the local scale, the Yundamindra Project covers both the south-western and south-eastern flanks and the southern nose of the Danjo Dome, a hornblende-granodiorite batholith which intruded mafic-felsic and lesser sedimentary lithologies.

This style of structural setting is commonly associated with the development of many of the region's most significant gold deposits. Although the area has had a long history of prospect-scale mining, it has not been subjected to systematic modern exploration and remains under-explored, particularly at depth.

This presents ARI with a unique opportunity to discover significant mineralisation near several processing facilities.

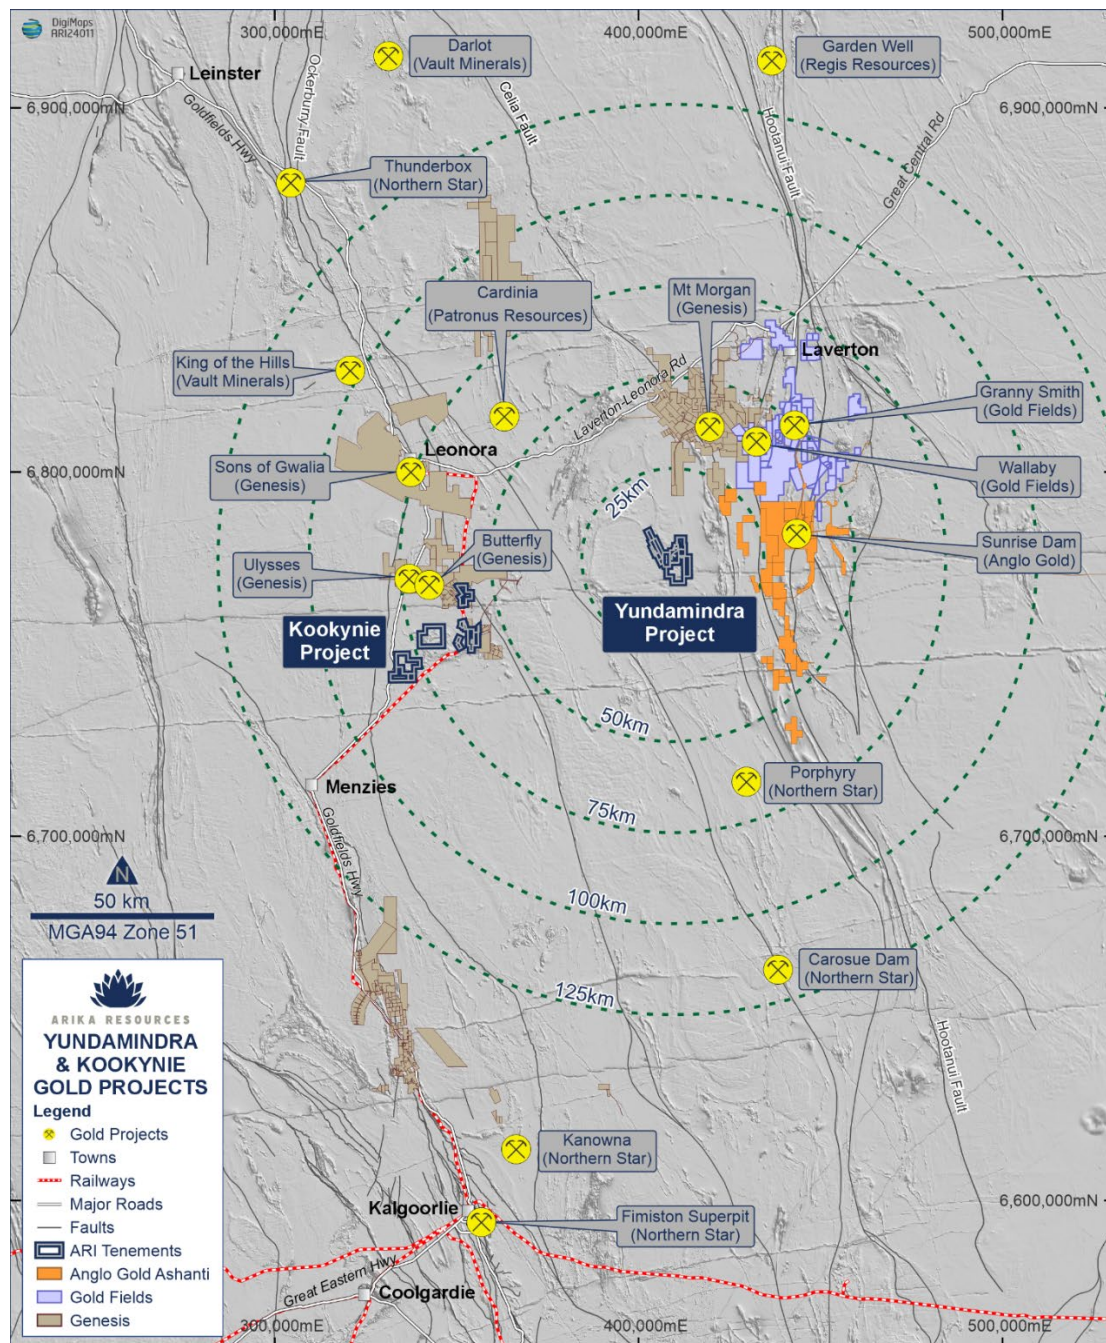


Figure 5: Regional Location Plan showing proximity of Yundamindra and Kookynie to Major Deposits, Mines and Processing Facilities.

Contributors

Omni GeoX, Core Geophysics, Newexco, Sugden Geoscience Pty Ltd, ERM Technical Mining Services, DigiMaps, Industrial Safe, Perenti Group, Karlkurla Pty Ltd



This announcement is approved by the Board of Arika Resources Limited.

ENQUIRIES

Investors

Justin Barton
Managing Director
+61 8 6500 0202
enquiries@arika.com.au

Media

Nicholas Read
Read Corporate
+61 8 9388 1474
info@readcorporate.com.au

Competent Person Statement

The information that relates to Exploration Results is based upon information compiled by Mr Steve Vallance, who is a full-time employee of Arika Resources Ltd in the role of General Manager Exploration and Executive Technical Director. Mr Vallance is a Member of The Australian Institute of Geoscientists (AIG). Mr Vallance has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (the JORC Code 2012). Mr Vallance consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Forward-Looking Statements

This announcement may contain certain “forward-looking statements” which may not have been based solely on historical facts but rather may be based on the Company’s current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have reasonable basis. However, forward-looking statements:

(a) are necessarily based upon a number of estimates and assumptions that, while considered reasonable by the Company, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies.

(b) involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements. Such risks include, without limitation, resource risk, metals price volatility, currency fluctuations, increased production costs and variances in ore grade or recovery rates from those assumed in mining plans, as well as political and operational risks in the countries and states in which the Company operates or supplies or sells product to, and governmental regulation and judicial outcomes; and

(c) may include, among other things, statements regarding estimates and assumptions in respect of prices, costs, results and capital expenditure, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions.

The words “believe”, “expect”, “anticipate”, “indicate”, “contemplate”, “target”, “plan”, “intends”, “continue”, “budget”, “estimate”, “may”, “will”, “schedule” and similar expressions identify forward-looking statements.

All forward-looking statements contained in this presentation are qualified by the foregoing cautionary statements. Recipients are cautioned that forward-looking statements are not guarantees of future performance and accordingly recipients are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein.

The Company disclaims any intent or obligation to publicly update any forward-looking statements, whether as a result of new information, future events or results or otherwise.

No New Information

To the extent that this announcement contains references to prior exploration results which have been cross referenced to previous market announcements made by the Company, unless explicitly stated, no new information is contained. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcements continue to apply and have not materially changed.



About Arika Resources Limited

We are focused on delivering value to shareholders through the development and discovery of high-quality gold assets, including the Kookynie and Yundamindra Gold Projects, in Western Australia.

Arika Resources Limited is continuing to build on the potential large-scale gold footprints at the Yundamindra and Kookynie Gold Projects by expanding on known mineralisation and targeting new discoveries through a pipeline of high priority brownfield and greenfield targets.



Appendix One – Significant Intercepts and Collars

Significant intercepts in the table below were calculated on a length weighted average basis.

Each RC hole drilled by Arika was sampled in its entirety from start to finish using a combination of 2m or 4m composites and 1m individual samples. For diamond drillholes the diamond cored section of each hole was sampled in its entirety from the start of each cored section to end of hole with sampling guided by geological observations and maximum sample lengths generally not exceeding 1m.

For the low-grade envelope this was based on a 1m sample returning an assay value of greater than 0.1 g/t Au and for the high-grade zone, based on internal intervals reporting assays greater than 0.5 g/t Au, 5.0g/t Au and 10.0 g/t Au respectively. The maximum width of internal waste was generally 4m however the mineralised intervals are based on geological observations and current interpretation. Consequently, in some instances a broader interval of internal waste, interpreted as a 'horse' of limited dip and strike extent may be carried in order to honour the true nature of the ore hosting structure as defined by adjacent drillholes at that location.

No top cut-off was applied due to the early nature of the assessment.

TABLE 1: YUNDAMINDRA EXPLORATION DRILLING RESULTS - RED BRICK ROAD

Prospect	GPX Target	Hole_ID	Collar Location and Orientation							Intersection >0.1g/t Au & >0.1 g/t Ag					Comments
			Type	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Assays		
									(m)	(m)	(m)	(m)	Au (g/t)	Ag (g/t)	
Bound to Rise	PWP3	25AYRC089	RC	411261	6778459	456.2	-60	200	82	25	30	5	0.14	NSR	
										48	52	4	9.21	1.13	
									incl	48	49	1	35.30	4.15	Repeat Assay: 33.73g/t Au in basalt
Bound to Rise	PWP3	25AYRC090	RC	411281	6778495	456.5	-60	200	118	47	49	2	3.33	0.74	
Bound to Rise	PWP3	25AYRC091	RC	411228	6778471	454.5	-60	200	82	24	36	12	0.17	0.16	4m composites
Bound to Rise	PWP3	25AYRC092	RC	411237	6778508	454.4	-60	200	148	57	60	3	1.14	1.00	
Highland Chief	PWP3	25AYRC093	RC	411310	6778709	453.6	-60	200	64	25	27	2	0.21	0.73	& 365ppm Cu Mafic schist
										37	38	1	0.15	0.28	& 388ppm Cu. Basalt hosted
										42	48	6	0.12	1.38	& 2010ppm Cu. Basalt hosted
Highland Chief	PWP3	25AYRC094	RC	411323	6778743	451.3	-60	200	100	51	64	13	0.24	1.84	& 2850ppm Cu. Tonalite hosted
										89	90	1	0.23	0.79	& 1469ppm Cu. Basalt hosted



Prospect	GPX Target	Hole_ID	Collar Location and Orientation							Intersection >0.1g/t Au & >0.1 g/t Ag					Comments
			Type	MGA_E	MGA_N	RL	Dip	Azimuth (Mag)	Depth	From	To	Length	Assays		
													(m)	(m)	
Queen of Sheba		25AYRC095	RC	410389	6779061	443.3	-60	195	76	39	40	1	0.53	0.24	Qz Vein - Queen of Sheba Lode
Queen of Sheba		25AYRC096	RC	410399	6779100	442.9	-60	195	112				NSR		
Queen of Sheba		25AYRC097	RC	410080	6779138	443.0	-60	195	76				NSR		
Queen of Sheba		25AYRC098	RC	410094	6779181	443.0	-60	195	112				NSR		
Pride of Pindinnie		25AYRC099	RC	410740	6779869	439.0	-60	185	52				NSR		
Pride of Pindinnie		25AYRC100	RC	410746	6779906	438.9	-60	185	88	53	55	2	0.19	NSR	
										75	76	1	0.13	NSR	



Appendix Two – JORC Code, 2012 Edition – Table 1

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	• <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	• All of the samples being reported on in this release were collected utilising industry standard Reverse Circulation (RC) drilling techniques. • All of the RC drilling was undertaken by Ranger Drilling, a fully owned subsidiary of the Perenti Diversified Mining Services Group (ASX: PRN) • Reverse circulation (RC) sampling was carried out using a rig mounted METZKE Static Cone Splitter. • Sampling was conducted by the drill offsidors on the drill rig and checked at the end of each rod (6 metres) by both the drilling contractor and the site supervising geologists to ensure that the sample ID’s matched the interval that was intended to be represented by that sample ID. No issues were seen or noted by the Competent person during the entire drilling campaign. These samples are kept onsite in a secure location available for further analysis if required. • All RC samples were sieved and washed to ensure samples were taken from the appropriate intervals. The presence of quartz veining +/- sulphide presence +/- alteration was used to determine if a zone was interpreted to be mineralised. • Sampling was additionally based on geological observations of interpreted intervals. • The quality of the sampling is industry standard and was completed with the utmost care to ensure that the material being sampled, can be traced back to the interval taken from the drill hole for RC chips. • Samples submitted for analysis weighed on average 3kg. • All samples described in this announcement have been submitted to Intertek Laboratory in Kalgoorlie for initial sample preparation prior to shipment to Intertek Perth for final analysis.
<i>Drilling techniques</i>	• <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg</i>	• All of the drilling described in this release was completed utilising industry standard RC drilling techniques.



	<i>core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	● RC drilling used a SREPS 760 downhole face sampling hammer with a nominal bit size of 5.5inch (125mm). ● All of the drilling was undertaken by Ranger Drilling using a DRA600 Reverse Circulation Drill Rig with a Sullair 1350cfm/500psi on board compressor mounted on a MAN TGA 41.480 8WD truck combined with an 1150cfm/350psi OX Hurricane Booster /Sullair Auxilliary Compressor mounted on MAN 41.480 8WD truck.
Drill sample recovery	● <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> ● <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> ● <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	● Sample recovery size and sample conditions (dry, wet, moist) were recorded. ● Drilling with care (e.g. clearing hole at start of each rod, regular cyclone cleaning) if water encountered to reduce incidence of wet samples. ● No relationship was displayed between recovery and grade nor loss/gain of fine/course material.
Logging	● <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> ● <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> ● <i>The total length and percentage of the relevant intersections logged.</i>	● All recovered samples from RC have been geologically logged to a level where it would support an appropriate Mineral Resource Estimate, mining studies and metallurgical test work. ● Logging was qualitative based on the 1 metre samples derived from RC drilling. Representative sample was collected in plastic chip trays which are securely stored on-site for future reference. ● Logging was qualitative based on geological boundaries observed. ● 100 percent of the drillholes were logged to capture all relevant geological units, structures and intersections.
Sub-sampling techniques and sample preparation	● <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> ● <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> ● <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> ● <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> ● <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including</i>	● RC chip samples were cone split from the drill rig into individual 1m green sample bags pre-numbered for hole depth and neatly laid out in 20m rows adjacent to the drill collar. ● A 1m sample was collected at the cone splitter on the RC rig in a pre-numbered calico bag. ● All RC samples were dry. All recoveries were >90%. ● Field duplicates, blanks and CRM standards were inserted every 25 samples. ● GEOSTATS standards or CRMs of 60 gram charges of G919-3 (Au grade of 0.87ppm Au), 916-2 (Au grade of 1.98ppm Au) and 918-2 (Au grade of 1.43ppm Au) and 919-8 (Au grade of 0.57ppm Au) were used in alternating and sporadic patterns at a



	<i>for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	ratio of 1 QAQC sample in 25 samples submitted. • Samples are dried (nominal 110 degrees C), crushed and pulverized to produce a homogenous representative sub-sample for analysis. All samples are pulverised utilising Intertek preparation techniques. • The Competent Person is of the opinion RC drilling and sampling method are considered appropriate for the delineation of gold mineralisation.
Quality of assay data and laboratory tests	• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	• Gold and multi-element analyses were undertaken by Intertek Genalysis in Perth, using routine fire assay and multi element analysis by FA50/OE04 and 4A/MS48 • This near-full digest is considered sufficient for this stage of exploration and the weathered nature of the samples. • Gold analysis was undertaken with 50-gram Fire Assay with OES finish. The detection limit for gold via this method is 5ppb (0.005ppm). • Laboratory QA/QC involves the use of internal lab standards using certified reference material, blanks, splits and replicates as part of the inhouse procedures. QC results (blanks, duplicates, standards) were in line with commercial procedures, reproducibility and accuracy. • Multi-Element analyses were carried out combining a four-acid digestion with ICP-MS instrumentation. A four-acid digest is performed on 0.25g of sample to quantitatively dissolve most geological materials. Analytical analysis performed with a combination of ICP-OES & ICP-MS. Element analyses include: Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cr, Cs, Cu, Fe, Ga, Ge, Hf, In, K, La, Li, Mg, Mn, Mo, Na, Nb, Ni, P, Pb, Rb, Re, S, Sb, Sc, Se, Sn, Sr, Ta, Te, Th, Ti, Tl, U, V, W, Y, Zn, and Zr. • The analytical method employed is appropriate for the styles of mineralisation and target commodity present. • No geophysical tools, spectrometers, handheld XRF instruments were used. • QAQC analysis shows that the lab performed within the specifications of the QAQC protocols. • No external laboratory checks have been completed.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures,</i>	• No umpire analysis has been performed. • Data was collected on to standardised templates in the field and data cross checks were performed verifying field data and assay results. • No adjustment to the available assay data has been made.

	<i>data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i>	• For all intercepts, the first received assay result is always reported.
<i>Location of data points</i>	• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i>	• Drill hole collars are picked up at the end of each hole by the site supervising geologist using a handheld Garmin GPS. Accuracy is +/-5m. • GDA94 Zone 51 grid system was used. • Collars will be picked up by a qualified surveyor using a DGPS (Trimble S7or equivalent). • The surveyed collar coordinates are sufficiently accurate and precise to locate the drillholes.
<i>Data spacing and distribution</i>	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• Drillholes were designed and drilled to test the validity of historical drilling information and not for Mineral Resource estimation and classification purposes. • No mineral classification is applied to the results at this stage. • 2m/4m composite and individual 1m interval samples and results described in this announcement were collected from a rig mounted cone splitter.
<i>Orientation of data in relation to geological structure</i>	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• Drilling was designed as perpendicular as possible to the interpreted structure that hosts mineralisation to avoid introducing any bias. • The drilling orientation and the orientation of key mineralised structures has not introduced a bias. • All drillholes were downhole surveyed using a north seeking Gyro survey tool.
<i>Sample security</i>	• <i>The measures taken to ensure sample security.</i>	• The chain of supply from rig to the laboratory was overseen by a contract geologist. At no stage has any person or entity outside of the contract geologist, the drilling contractor, contract courier, and the assay laboratory come into contact with the samples. • Samples were delivered by Arika field personnel and/or it's contractors to the Intertek laboratory in Kalgoorlie for initial sample preparation then to Maddington for analysis.

<i>Audits or reviews</i>	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• No external audit of the results, beyond the laboratory internal QAQC measures, has taken place. • QA/QC data is regularly reviewed by MCT, and results provide a high-level of confidence in the assay data.
--------------------------	--	--

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The drilling being reported on in this announcement was undertaken within Mining Leases, M39/410; M39/409; and M39/840. Arika operates within a Joint Venture Agreement with Nex Metals Exploration (NME) and holds 80% with NME holding the remaining 20%. Please refer to announcement “Metalicity Achieves Earn-In On The Kookynie & Yundamindra Gold Projects” dated 21st December 2023. • No impediments exist to obtaining a license to operate over the listed tenure at the time of reporting.
<i>Exploration done by other parties</i>	• <i>Acknowledgment and appraisal of exploration by other parties.</i>	• Arika Ltd has completed a review of historical data and made corrections to previously supplied data from the JV partner NME. • The Yundamindra areas has been subject to multiple phases of exploration since discovery of gold before 1899. Further small-scale mining occurred until the 1940’s. Exploration activities between the late 1970’s into the early 1980’s was completed by Pennzoil Australia, Kennecott Exploration with Hill Minerals, and Picon Exploration. • Mt Burgess Gold Mining Company undertook significant exploration drilling to generate resource estimates for the western and eastern lines of mineralisation in 1988 and 1989 respectively. Sons of Gwalia entered into a JV with Mt Burgess in the mid 1990’s which lasted until 1999 then held the project tenements outright until 2003 which included exploration activities, a re-optimisation study in 1997 on part of the Western Line of mineralisation, as well as further resources estimates. Saracen Gold held the project tenements from 2006 until 2010 until it entered into a



		JV with NME. NME controlled the project outright from 2013 until entering into a JV with Arika in 2019.
Geology	• <i>Deposit type, geological setting and style of mineralisation.</i>	• Yundamindra: • The Yundamindra Project lies within the Murrin-Margaret sector of the Leonora-Laverton area; part of the north-northwest to south-southeast trending Norseman-Wiluna Greenstone Belt of the Eastern Goldfields Province of the Yilgarn Craton. • The Murrin-Margaret sector is dominated by an upright, north to north-northwest trending asymmetric regional anticline (Eucalyptus Anticline) centred about the Eucalyptus area. The western limb of the regional anticline has been intruded by granitoids (Yundamindra area). Strike-slip faulting is dominant along the eastern limb. • The Yundamindra Project encompasses zones of gold mineralisation occurring along the margin of a regional scale hornblende-granodiorite batholith which intruded mafic lithologies. The contact is sub-divided into two 'lines' of mineralisation, western and eastern. • The Western Line consists of a north-northwest trending zone of generally continuous, east dipping quartz reefs and quartz filled shears in granitoids, near the contact between a large hornblende granodiorite pluton and a thin remnant greenstone succession. The lode generally strikes parallel to a regional north-northwest schistosity in the mafic succession immediately to the west. Folding and faulting has dislocated the continuity of the lode in places and produced domal structures. • The Eastern Line encompasses the eastern portion of the arcuate granodiorite/greenstone contact with gold mineralisation associated with quartz veining within the mafic succession and within quartz vein/stockwork within granodiorite. • All exploration targets, prospects and deposits are interpreted as orogenic shear-hosted exploration targets for gold mineralisation.

<i>Drill hole Information</i>	● <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> ● <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	● All discussion points are captured within the announcement above. ● For RC drilling, dip and azimuth data is accurate to within +/-5° relative to MGA UTM grid (GDA94 Z51). ● For all drilling, down hole depth and end of hole length is accurate to with +/- 0.2m. ● All RC and diamond drillholes completed by Arika were surveyed downhole using a north seeking Gyro tool supplied by the drilling contractor. ● A collar table is supplied in the appendices. ● A summary of significant intercepts table is supplied in the Appendices.
<i>Data aggregation methods</i>	● <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> ● <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> ● <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	● Intercepts are reported as down-hole length on 2m/4m composites and/or 1 metre individual samples from RC drilling. ● Gold intercepts have been calculated using the weighted average method for all intervals reporting >0.1g/t Au. ● Intercepts are reported as down-hole lengths and average gold intercepts are calculated with a 0.1 g/t and 0.5 g/t Au lower cut, no upper cut and <4m internal dilution. ● Intercepts were defined geologically based on an interpretation of the target zone at a given location. ● Length weighted grades were then calculated based on a sample returning an assay value of greater than 0.1 g/t Au for the low-grade envelope and internal zones of greater than 0.5 g/t Au and 5.0 g/t Au. Generally, no more than 4 metres of internal material that graded less than 0.1 g/t Au was included except where a Raft or 'Horse' of lower grade country rock was interpreted as being within the targeted lode zone as defined by adjacent holes. ● Intervals were based on geology and no top cut off was applied.

		No metal equivalents are discussed or reported.
<i>Relationship between mineralisation widths and intercept lengths</i>	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	All holes reported here are designed to intersect the target zone/mineralisation orthogonal to both strike and dip. The downhole length is therefore close to the true thickness.
<i>Diagrams</i>	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	- A selection of appropriate maps and sections are included within the body of the report. - Please see main body of the announcement for the relevant figures showing the drillholes completed.
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All results and all plans are presented in a form that allows for the reasonable understanding and evaluation of the exploration results being announced.
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- The area has had significant historical production recorded and is accessible via the MINEDEX database. - All material results from geochemical, geophysical, geological mapping and drilling activities related to prospects across the Yundamindra Gold Project have been disclosed.
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not	- Follow up exploration activities will include but not limited to RC and diamond drilling and planned for the remainder of 2025 pending outcomes from the drilling results and ongoing interpretation. - Diagrams pertinent to the areas in question are supplied in the body of this announcement.

	<i>commercially sensitive.</i>	
--	--------------------------------	--